


PORTABLE GAS MONITOR

COMPACT, LIGHT WEIGHT INTELLIGENT UNIT WITH A BROAD SPECTRUM OF FEATURES TO DETECT TOXIC GASES AND OXYGEN DEFICIENCY

SMART GAS MONITOR

MODEL NO. : 2015

The advanced micro-controller technology employed makes these alert meters highly dependable, reliable and accurate. The complete automatic operation and calibration feature leaves no scope for user error. It has inbuilt Alarm with Vibration. These compact, self contained and intrinsically safe designs are housed in a weather proof and dust resistant high impact plastic.

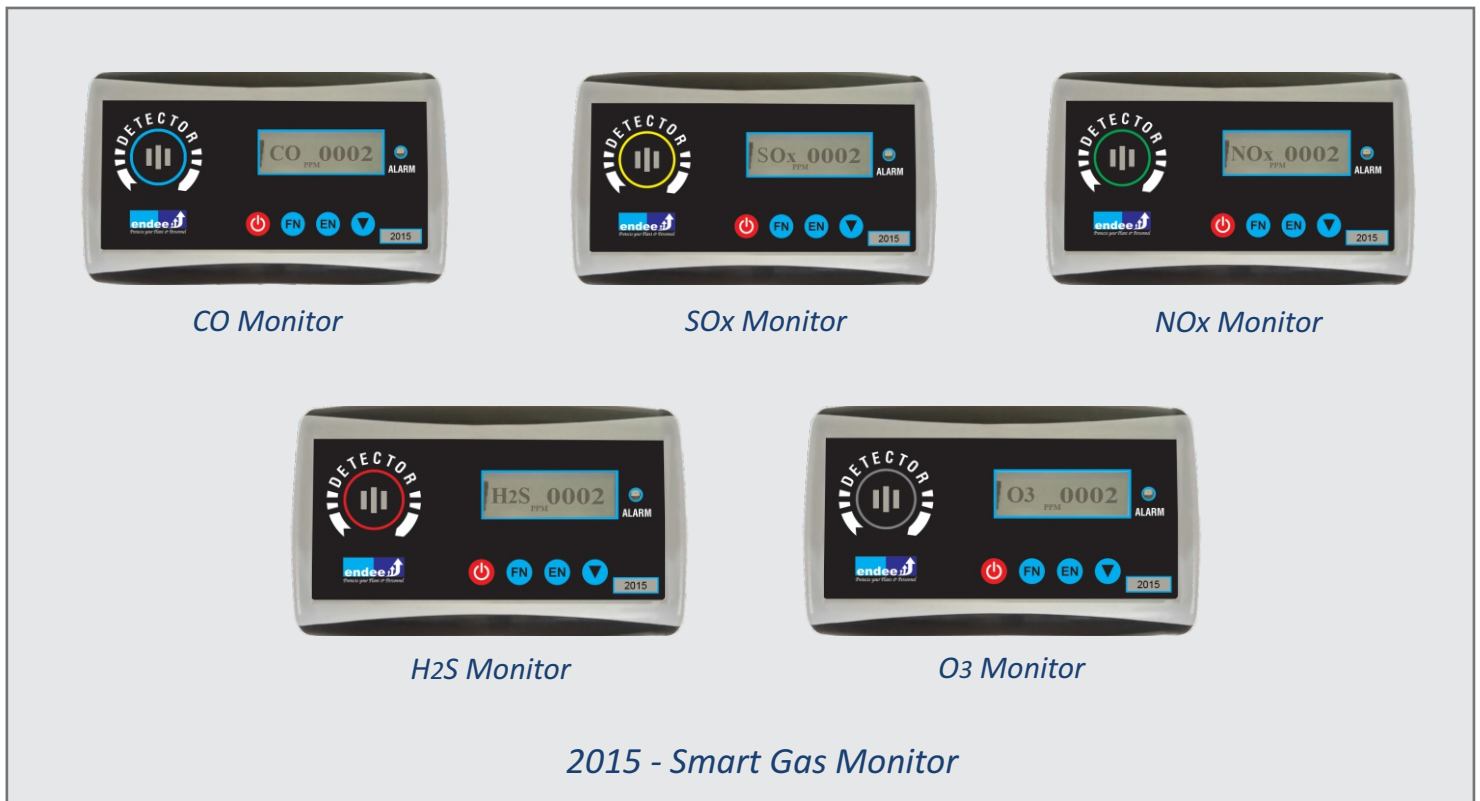

SPECIAL FEATURES

- Compact size helps you carry it in hand/pocket
- Rechargeable Battery
- Graphic Display
- Inbuilt Alarm with Vibration
- Adjustable Alarm Setting
- Auto zero with fresh air as sample gas
- 4 Key Operation

APPLICATIONS

- Refineries
- Petrochemicals
- Oil and gas
- Pharmaceutical
- Steel
- Fertilizers
- Process industries

SPECIFICATIONS

Type	: Portable, Smart, Pocket size
Detectable gases / parameters	: Toxic gases, oxygen
Electronics / processor	: Micro-controller
Power supply	: 3.7 V DC Rechargeable Li-ion battery
Display	: 128 * 32 Graphic display
Alarm	: LOW & HI (Inbuilt low battery alarm with Vibration)
Technology / Sensor	: Electrochemical
Resolution	: 1 PPM or 0.1 PPM / %V/V
Accuracy	: ± 2% of Range / For O ₂ : 0.5 % of Range
Response time	: Less than 30 sec
Operating temperature	: 0 to 55 °C
Sampling	: Diffusion
Housing	: High Impact ABS
Accessories	: 230 VAC, 50 Hz Charger
Sensor life	: Approx. 2 - 3 years
Measurement	: Continuous
Relative humidity	: 0 - 95 % Rh
Dimensions	: 109 x 65 x 25 mm
Weight	: 125 gm

GASES AND RANGES

1. CO	: 0 - 20 / 0 - 4000	PPM	7. NO	: 0 - 10 / 0 - 5000	PPM
2. Cl ₂	: 0 - 3 / 0 - 2000	PPM	8. NO _x	: 0 - 3 / 0 - 1000	PPM
3. H ₂	: 0 - 1000	PPM	9. NH ₃	: 0 - 10 / 0 - 1000	PPM
4. H ₂ S	: 0 - 5 / 0 - 1000	PPM	10. O ₂	: 0 - 25 / 0 - 100	%V/V
5. HBr	: 0 - 5 / 0 - 200	PPM	11. SO _x	: 0 - 20 / 0 - 2000	PPM
6. HCN	: 0 - 10 / 0 - 200	PPM	12. O ₃	: 0 - 1000	µg/m ³

ORDERING INFORMATION

Model No
2015

GASES

O₂ / Toxic / O₃

RANGES

0 - 25 %V/V / 0 - 1000 PPM / µg/m³

Note : Images shown are indicative only. Specifications and Features will vary with application. There may be changes overtime due to continuous development process.
@ 2018



ENDEE ENGINEERS PVT. LTD.

Office & Works : D/122, Ansa Industrial Estate, Saki-Vihar Road, Saki-Naka, Andheri (E),
Mumbai - 400 072, Maharashtra, India. | Tel.: +91-22-4295 2180 / 81
Email : sales@endee-engineers.com
Website : www.endee-engineers.com