


FLAME DETECTOR

UV DETECTOR FOR BURNER CONTROL

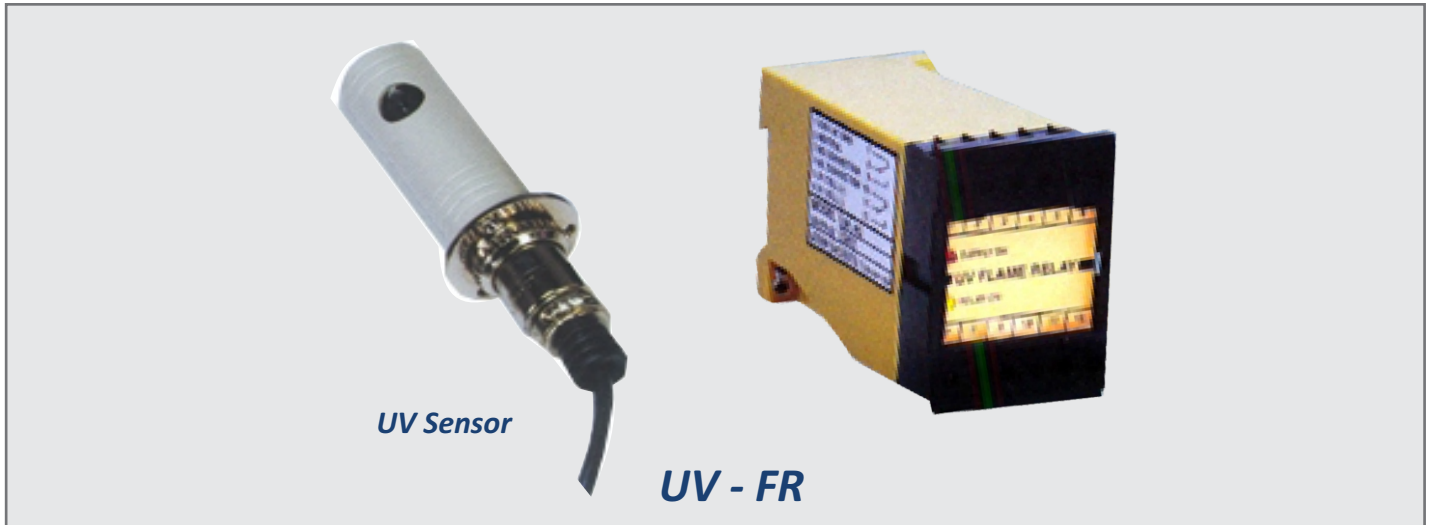

APPLICATIONS

Endee UV Flame Sensor uses very sensitive electronic UV tube. The specially tuned UV tube is designed to detect UV radiations emitted by the naked flame. The UV Flame Sensor is insensitive to normal light and re-factory glow in furnace walls. UV Sensor is ideally suited for detecting all types of flame, namely flames due to Gas / Coal / Oil fired burners in Boiler and Furnaces.

UV Sensor has been specially designed for harsh industrial environment. It provides for easy cleaning of the UV Sensor and viewing of the flame. UV Flame sensor is housed in a metal jacket to provide mechanical protection and various mounting features.

UV Flame Amplifier / Relay is used in conjunction with UV Flame Sensor to detect various types of flames namely gas, oil, coal etc. The UV Flame Amplifier is essentially a stand alone unit, which has two potential free relay contact outputs rated at 220 V AC, 4 Amps. The output contacts can be used for alarm, annunciation or trip purposes. The front panel has indications for SUPPLY ON. This will turn ON when the supply is given. RELAY ON indicator confirms presence of UV radiation / flame. Model UV - FR, has a site adjustable time delay of 2 - 8 seconds and is useful for installations with high flicker situation.

UV Flame Amplifiers / Relay has been designed to work with Endee make UV Sensor. However, it work satisfactorily with UV Sensors rated 220 V AC rms of various other makes.

SPECIFICATIONS

Temperature Range	:	-40 to 125 °C
Response Time	:	Less than 1 Second
Relay Unit	:	220 V AC, 50Hz, 4 AMP
Enclosure	:	IP40

Note : Images shown are indicative only. Specifications and Features will vary with application. There may be changes overtime due to continuous development process.
@ 2018